



**LEADING THE INDUSTRY WITH QUALITY YOU CAN DEPEND ON**

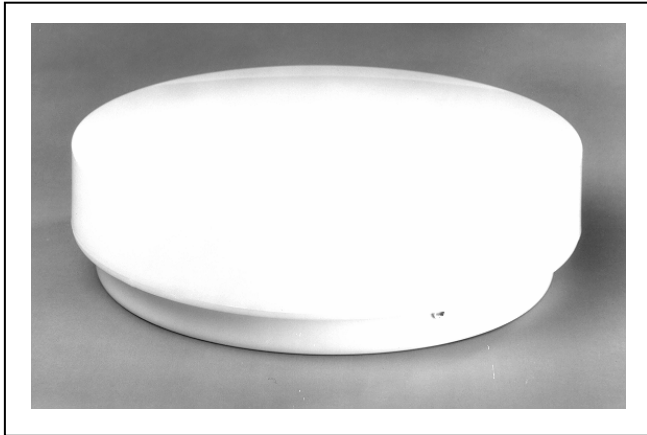

## Electronic Drum

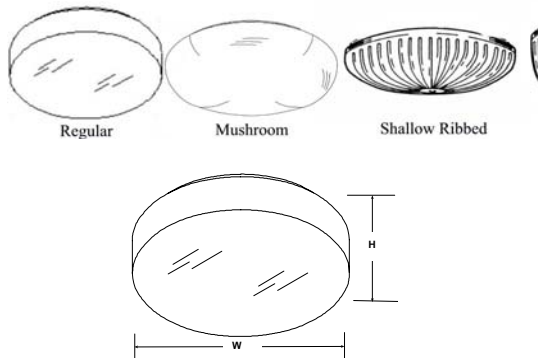

- Recommended for Commercial Applications
- Electronic Programmed Start Ballast, 1 Second Delay, Not a Hard Start Insuring Longer Lamp Life, PC and Motion Sensor Friendly
- Electronic Highest Quality USA Programmed Start Ballast, 120-277V, 45,000+ Hour Class P Thermally Protected
- High Power Factor: > 0.95, THD< 20% Crest Factor< 1.7, Class A Sound Rating, End Of Life Protection
- Minimum Start Temperature 0°F, -18°C
- UL Damp Location
- Long Life - Lasts 12 Times Longer Than Incandescent Equivalent, Fewer Lamp Changes
- Wall or Ceiling Mount 11", 14", or 19"
- Cool White Lamps Standard, Warm White (WW) Upon Request
- High Impact White Acrylic Diffuser Standard, Mushroom or Ribbed Available Upon Request (14" only)
- Polycarbonate Regular & Mushroom Lens Available Upon Request
- Stamped Steel Pan With White Powder Coat Finish, 3 Screws for Lens Security Powder Coated Aluminum (A) Pan Available Upon Request in 11" and 14"

Model	Watts	Voltage	Initial Lumens	Rated Average Lamp/Ballast Life	Dimensions	
					W	H
1013E-L	13 (1x13)	120-277	900	10,000+/45,000+Hrs	11"	3"
1026E14-L	26 (2x13)	120-277	1800	10,000+/45,000+ Hrs	14"	3"
1032E	32 (1x32)	120-277	2400	10,000+/45,000+ Hrs	14"	3"
1036E-L	36 (2x18)	120-277	2500	10,000+/45,000+ Hrs	14"	3"
1052E19-L	52 (2x26)	120-277	3600	10,000+/45,000+ Hrs	19"	4.5"

**Add "WW" To The Model Number For Units Requiring Warm White Lamps**

**Vertically Integrated Manufacturer  
Made In USA**