



flow, stop and go®

# Perlator® Faucet aerator




### FEATURES

- Watercolours® design: color coding to identify flow rate and stream pattern (U.S. patent pending).
- Integrated anti-liming Honeycomb® replaces conventional wire mesh screens prone to lime build up.
- Anti-clogging dome screen filters sediment and particles.
- Patented construction provides a splash-free stream, well aerated and soft to the touch.
- Compatible with all NEOPERL® regular male and female housings, vandal proof and metric size housings.
- Available housing finishes: unplated, chrome and PVD.
- Laser marked housings: statutory mark and custom logo.
- Rubber washer.

### CERTIFICATION

ANSI/NSF 61  
ASME A112.18.1M  
CSA B125

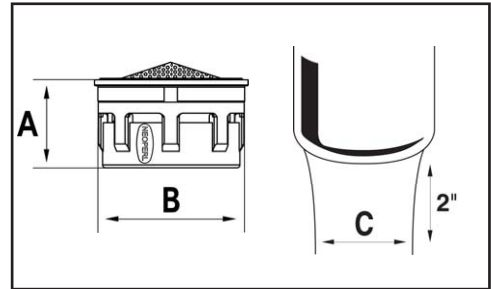

### PART NUMBERS\* & PACKING


Designation	Part #	Packing
Insert only	40.3032.000	2500
Regular male 15/16"-27	B1.1123.1	500
Regular female 55/64"-27	B1.1113.1	500
Reg. dual thread 15/16"-27 / 55/64"-27	B1.1173.1	500
Vandal proof regular male 15/16"-27	B9.1123.1	400
Vandal proof regular female 55/64"-27	B9.1113.1	400
Vandal proof dual thread	B9.11F3.1	400
Regular vandal key	BX.399C.1	

\*Other combinations also available

### COLOR CODE


Dome: Green      Diffuser: White      Basket: Dark gray

### FLOW RATE CURVE

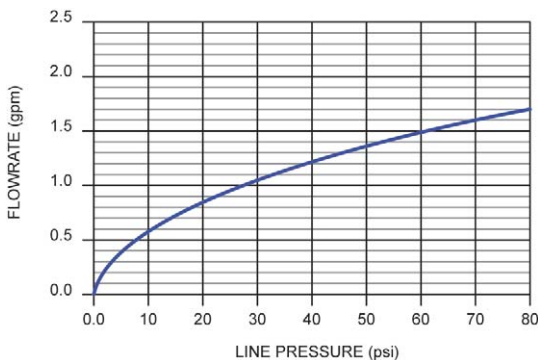

### DIMENSIONS

No	mm	In
A	12.00	.472
B	19.97	.786
C	≈ 13	≈ 1/2

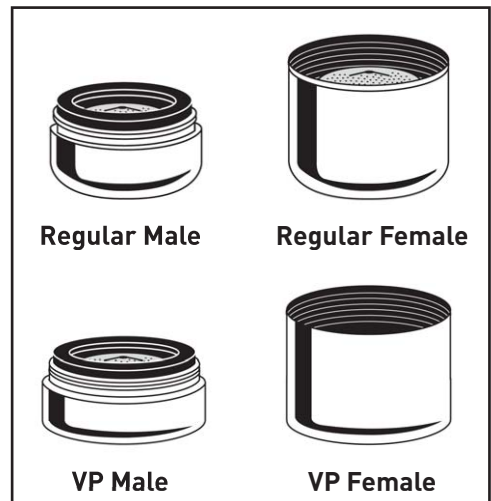

### TECHNICAL DATA

Materials: Body      Acetal  
 Washer      EPDM  
 Working temperature: 150°F  
 Working pressure: 125 psi