



flow, stop and go®

# Perlator® Faucet aerator


**1.5 gpm**  
Flow Restricted  
Junior Size

### FEATURES

- Anti-liming Honeycomb® replaces conventional wire mesh screens prone to lime build up.
- Anti-clogging dome screen filters sediment and particles.
- Color-coded to identify flow rate.
- Patented construction provides a splash-free stream, well aerated and soft to the touch.
- Compatible with all NEOPERL® junior male and female housings.
- Available housing finishes: unplated, chrome and PVD.
- Marking: roll (custom and/or statutory mark) or laser for vandal proof housings only (custom logo possible).
- Rubber washer.

### CERTIFICATION

ANSI / NSF 61  
ASME A112.18.1M  
CSA B125

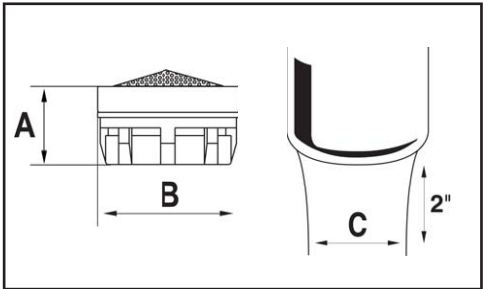

### PART NUMBERS\* & PACKING

Designation	Part #	Packing
Insert only	B2.2107.1	4000
Junior male 13/16"-27	B1.2193.1	500
Junior female 3/4"-27	B1.2183.1	500
Vandal proof junior male 13/16"-27	B9.2193.1	500
Vandal proof junior female 3/4"-27	B9.2183.1	500
Junior / Regular vandal key	BX.011C.1	


### DIMENSIONS

No	mm	In
A	10.16	.400
B	18.24	.718
C	≈ 11	≈ 7/16


\*Other combinations also available

### COLOR CODE

Dome: Green      Ring: Gray      Basket: Gray

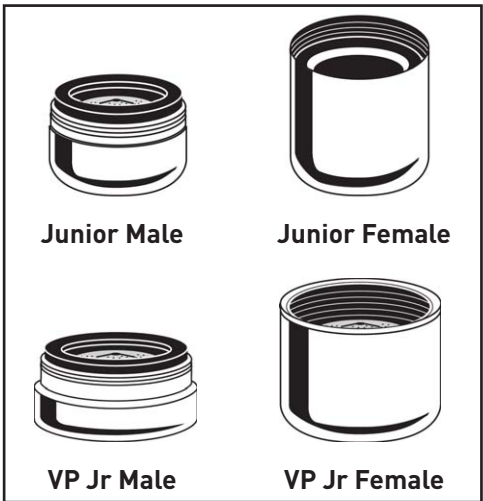

### FLOW RATE CURVE

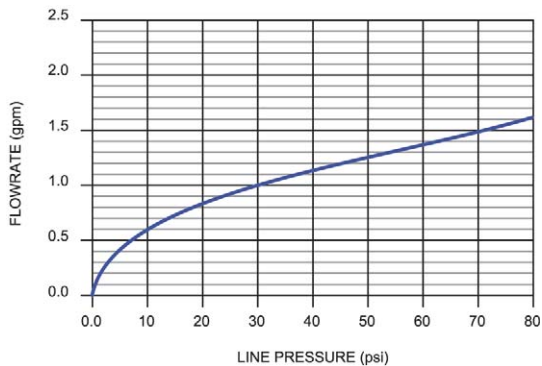

### TECHNICAL DATA

Materials: Body      Acetal  
                  Washer      EPDM  
 Working temperature: 150°F  
 Working pressure: 125 psi